# TYPE 'R'

## Mount




### DESCRIPTION

The mounting consists of rubber bushes and steel washers and distance sleeve. The rubber is protected with a flexible paint and the steel elements are protected with a zinc plated finish.

### APPLICATION

The type 'R' mount is an anti-vibration mount.

The preferred mounting arrangement is with the bolt centre line vertical, as shown below. However, in cases where the centre of gravity overhang would be small, the mount can be oriented in any direction. When assembled with an appropriate linking cage, the 'R' mount is known as an 'S' mount (sizes 2, 4, 6 only).

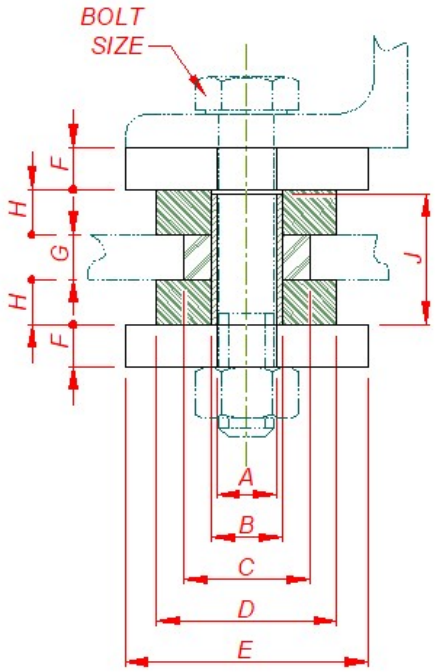


| Part No. | NATO Stock Number(s) | Mount size no. | Supported Nominal Load kg |
|---|---|---|---|
| 15/401 | 5340-99-961-2289 | 1 | 5 |
| | 5340-99-734-9847 | | |
| | 5340-99-347-0389 | | |
| 15/402 | 5340-99-306-2879 | 2 | 10 |
| | 5340-99-730-6589 | | |
| | 5340-99-958-2927 | | |
| 15/403 | 5340-99-051-7346 | 3 | 18 |
| | 5340-99-450-7839 | | |
| 15/404 | 5340-99-374-7173 | 4 | 27 |
| | 5340-99-300-0897 | | |
| | 5340-99-341-4301 | | |
| 15/405 | 5340-99-660-7573 | 5 | 36 |
| | 5340-99-327-7499 | | |
| 15/406 | 5340-99-783-2099 | 6 | 45 |

| Part No. | Mount size no. | Supported Nominal Load | Dimensions, mm | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | kg | A | B | C | D | E | F | G | H | J | Bolt Size |
| 15/401 | 1 | 5 | 13 | 17 | 24 | 32 | 42 | 10 | 16 | 10 | 34.5 | M12 |
| 15/402 | 2 | 10 | 13 | 17 | 27 | 37 | 50 | 10 | 16 | 14 | 42.5 | M12 |
| 15/403 | 3 | 18 | 17 | 21 | 30 | 40 | 52 | 13 | 16 | 14 | 42.5 | M16 |
| 15/404 | 4 | 27 | 17 | 21 | 35 | 50 | 68 | 13 | 16 | 16 | 46.5 | M16 |
| 15/405 | 5 | 36 | 21 | 25 | 44.5 | 60 | 80 | 15 | 16 | 16 | 46.5 | M20 |
| 15/406 | 6 | 45 | 21 | 25 | 44.5 | 64 | 86 | 15 | 16 | 16 | 46.5 | M20 |