

ITW GSE

7400 JetEx 28 VDC eGPU

Battery-powered Ground Power Unit
Ideal for hangars and remote use



Large battery capacity
allowing numerous engine starts

It's all about connections



EXTREME FLEXIBILITY



INDEPENDENT AND POWERFUL

The 28 VDC JetEx eGPU is independent due to the onboard battery. Powerful enough to perform up to 100 engine starts on a full charge, the 7400 JetEx is the ultimate in battery driven units. It can even be charged while delivering power to an aircraft.

This innovative eGPU can be used for engine starts, ramp operations and test of avionics.

BUILT TO LAST

Modular design is the basis of ITW GSE design and the 7400 eGPU is no exception. Components are well organized thus ensuring fast service and repair. The eGPU has no rotating parts, subject to wear and tear and is therefore practically maintenance free. The overall result is a very reliable and dependable GPU that is built to last. The eGPU is furnished with a weatherproof steel cabinet, mounted on a pneumatic tire trailer that can easily be towed.

EQUALLY IDEAL FOR HANGAR AND REMOTE USE

Quiet and emission free operation is what you get with the 28 VDC JetEx eGPU. The unit is autonomous and can be in use for long periods of time before it needs recharging. These qualities make this eGPU ideal for hangars and remote use.

ADJUSTABLE VOLTAGE


To ensure the best voltage quality at the aircraft plug, the operator can adjust the voltage compensation via the set-up menu in the user interface. The compensation can be done automatically via feed-back from the F-signal or it can be manually set. Also, the 7400 JetEx offers Line Drop Compensation, Current Limit (300 to 2000 Amps). Those features can easily be configured and provide the operator unprecedented flexibility for ramp and hangar operation.

A WELL-PROVEN SOLUTION

INNOVATIVE eGPU – BUILT ON KNOWN TECHNOLOGIES

The JetEx eGPU is powered by a battery pack based on state-of-the-art Li-ion technology and with a capacity of 40 kWh. It is designed to comply with the highest safety regulations and quality requirements.

At the output of the eGPU is ITW GSE's tried and tested 28 VDC solid-state converter. This combination of well-proven technologies has created the rock-solid eGPU with enough power to perform up to 100 engine starts on a full charge.

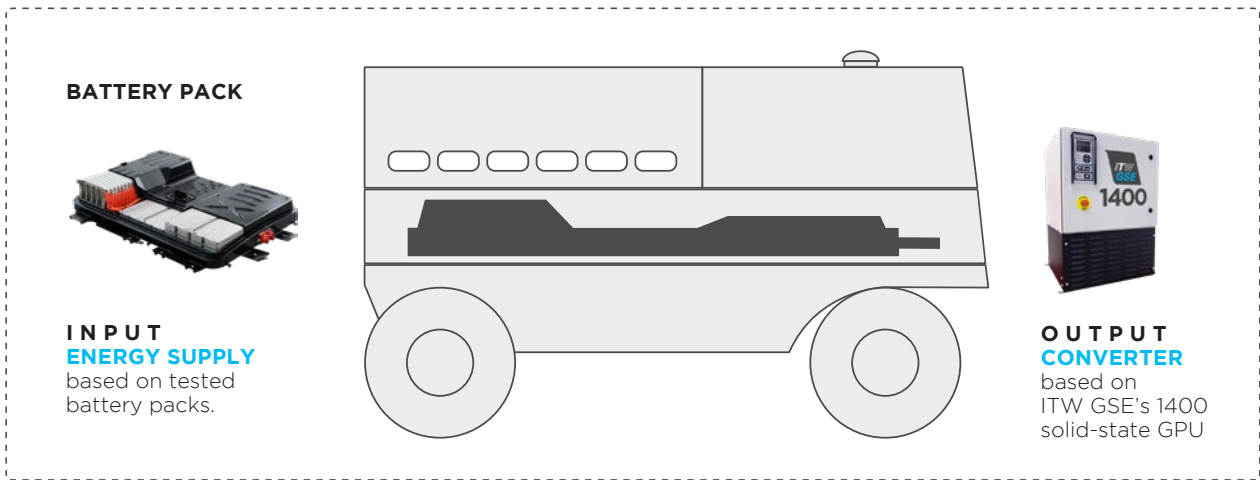

SAME EASY-TO-USE PLATFORM AS ALL OTHER ITW GSE PRODUCTS

Like all ITW GSE products, the 7400 JetEx eGPU has a common icon-based user interface that is as easy to use as a smartphone or a tablet. This means airport employees already familiar with one ITW GSE product can easily operate another, reducing human error during operation and making product training easier.

MODULAR DESIGN

Modular design is the hallmark of ITW GSE. The 7400 JetEx is built from modular components, ensuring fast replacement, servicing and spares commonality.



SPECIFICATIONS

ITW GSE 7400 JetEx mobile 28 VDC eGPU

Input

- Charger Power: 15 kW @ 3-phase
5 kW @ 1-phase
- Charger input voltage range:
3 phase @ 260-530 V / 45-65 Hz
1 phase @ 170-300 V / 45-65 Hz
- Maximum pre-fuse: 50 A

Output

- Current: 600 A continuously
- Engine Start Capability: 2400 A
Voltage: 28 VDC (or as adjusted)
- Ripple: less than 2% at full load
- Voltage regulation:
<0.5% from no load to full load
- Voltage compensation:
3 V @ 600 A
Manual or voltage feed-back
via interlocks

Weight (Without cables)

- Mobile unit approx.
740 kg (1630 lbs.)

Environmental

- Operating temperature:
-10°C to 45°C (14°F to 113°F)
without additional heating/cooling.
For other operational temperatures,
please contact ITW GSE
Relative humidity 10-100%
- Noise level: <65 dB(A)@1m
- typically 60 dB(A)

Overload ratings

- 600 A continuous use
- 600-1200 A for 120 seconds
- 1200-1500 A for 60 seconds
- 1500-1900 A for 30 seconds
- 1900-2400 A for 10 seconds
- 2400 A maximum

The ITW GSE 7400 JetEx eGPU is well suited to cover the power need for aircraft like the following:

- Cessna Citation
- Beechcraft
- Gulfstream G250
- Dassault FalconJet
- ATR 42 & 72
- Bombardier Q Series / Dash 8

Standards

- ISO 6858:2017(E) Aircraft ground support electrical supplies - General requirements
- MIL-704F Aircraft electric power characteristics (Machinery - Specific safety requirements)
- EN 12312-20 (Machinery - Electrical safety)
- EN 60204-1 LVD - Safety standards
- EN 62040-1-1 LVD - Safety standards
- EN 61558-2-6 EMC - Immunity standard
- EN 61000-6-2 EMC - Emission standards
- EN 61000-6-4 EMC - Emission standards
- AHM 907 Guidelines for electric powered GSE (e-GSE)

Miscellaneous

- MTTR: max. 20 minutes
- Communication: TCP/IP, USB

Protection

- Protection class: IP55 (electronic section)
- Over/under voltage at in/output
- Over temperature
- Internal voltage error
- Short circuit at output
- Trip in case that:
- U<20 VDC for more than 4 seconds
- U>32 VDC for more than 4 seconds
- U>40 VDC for more than 150 ms



Options



Output cables upon request

Standard Features/Equipment

- Beacon* for operation/charging
- Beacon* for warning/ low battery incl. siren
*Color: specify yellow, blue, red or green
- Simultaneous charging while supplying 28 VDC power

Standard Options Available

- Input cable and plug according to clients specifications
- Towbar with DIN40 towing eye
- Monitoring over GSM/GPS

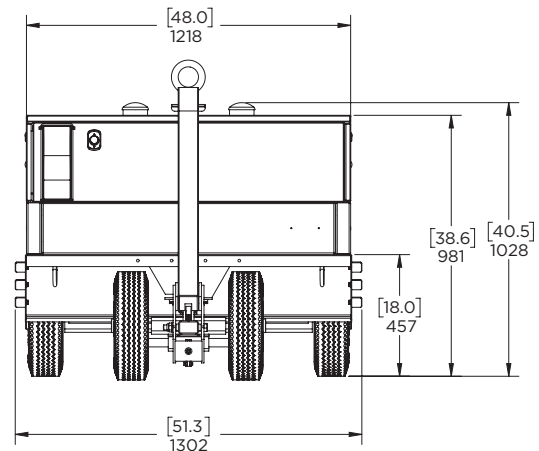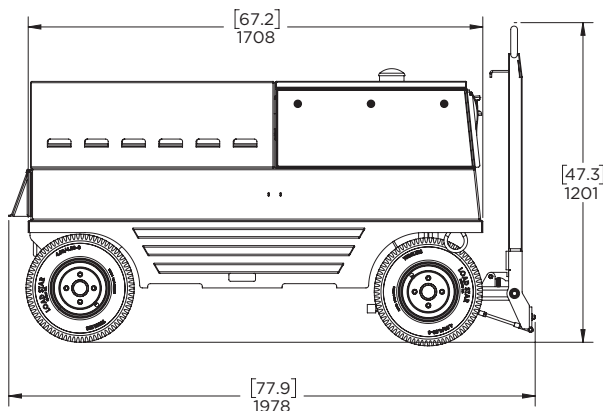

Dimensions are shown in mm and [inches]