



SHIFTEC

Type 'PD'




APPLICATIONS

The Type 'PD' mount is a general-purpose resilient mount used primarily for vibration isolation. For shock isolation installations the snubber washers are used in pairs to provide captivity.

DESCRIPTION

The mounting consists of a rubber element bonded between steel plates. The rubber is protected by flexible paint.

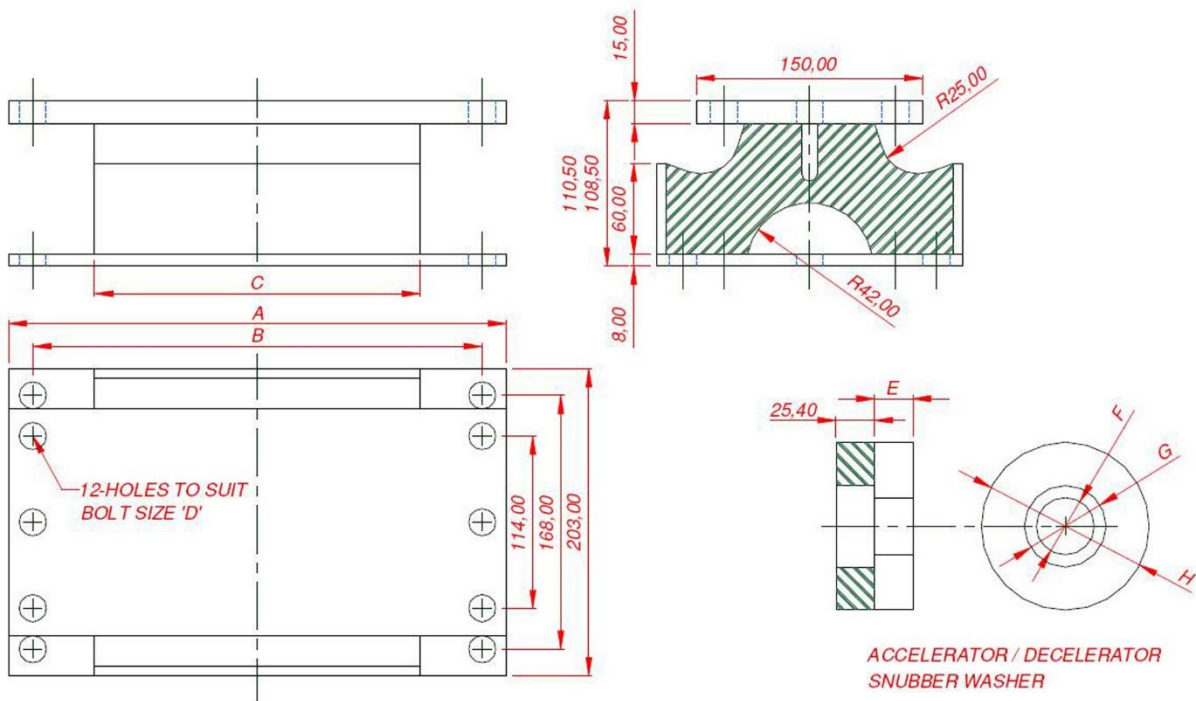

Part No.	NATO Stock Number	Mount Size	Component	Supported Mass	Dimensions								
					A	B	C	D	E	F	G	H	
15/201	5340-99-537-5052	P5D	Mount	750-1100	210	178	127	M12					
15/202	5340-99-537-5053	P5D	Washer						16	26	48	86	
15/203	5340-99-537-5054	P7D	Mount	1160-1700	267	235	184	M12					
15/204	5340-99-537-5055	P7D	Washer						19	32	51	98	
15/205	5340-99-769-7909	P8 ¼ D	Mount	1700-2500	330	298	216	M16					
15/206	5340-99-537-5057	P8 ¼ D	Washer						25.4	38	54	11	

DEFENCE DYNAMICS

shiftec.com

Neachells Lane, Willenhall, West Midlands, WV13 3SN, United Kingdom

T: +44 (0) 1902 308 000

E: sales.dd@shiftec.com

MEMBER OF



While care has been taken to ensure that the information contained in this publication is accurate, we do not accept responsibility or liability for information which is found to be misleading. Specifications can change without notice.