



DC/DC converter for railway applications

Description

The 25W MBRH is an enhanced version of the well established Martek Power 15W MBR series. The MBRH offers all the same electrical features as the MBR, and in the same enclosure, but at an increased output power rating of 25 Watts. One of the main benefits of both the MBR and MBRH over similar products is that they incorporate all of the components necessary for full EMC compliance and EN50155 class S2 interruptions (10ms hold-up time). It is not necessary for any additional filtering or capacitors to be added by the end user. Intended for rail applications, these encapsulated modules are fully compliant with both the latest European norms and the older BRB RIA standards.

Special features include:

- Single and dual output versions
- Rugged encapsulated construction
- Requires no external filter components or capacitors for hold-up
- Equally suitable for PCB or bulkhead mounting (choice of cables connections or PCB pins)

Input specifications

The following input voltages versions are available as standard:

110V	(66.0 - 137.5V)	dc	(Suffix A)
72V	(43.2 - 90.0V)	dc	(Suffix D)
52V	(31.2 - 65.0V)	dc	(Suffix C)
36V	(21.0 - 50.4V)	dc	(Suffix F)
24V	(16.8 - 33.6V)	dc	(Suffix B)
230V	(185.0 - 265V)	ac	(Suffix Z)

Parameter	Detail
Input Ripple	To RIA 13 and EN50155
Input Protection	Reverse polarity protection. Surges and transients to RIA 12 & EN50155
Inrush Current	Limited to typically 5 x nominal current (after 0.1ms)
Efficiency	80% typical
Hold-up time	10ms to EN50155 Class S2

Output specifications

Parameter	Detail
Maximum Output Power	25W (20W for 5Vdc output version)
Output Versions	Single and Dual. Dual output models are +/- with common zero
Output Voltage	Can be specified from 5V to 48V
Setting Tolerance	±1.0% at 50% load, 15°C to 25°C



Powering Business Worldwide


Output specifications (Continued)

Parameter	Detail	
Minimum Load	Typically zero for all outputs, although in some cases a minimum load of up to 5% on U1 for full performance.	
Line Regulation	±0.2%	
Load Regulation	±0.5%	
Temperature Coefficient	<0.02% / °C	
Output Ripple	<1% Pk-Pk of Output Voltage	
Output Noise	<50mV Pk-Pk superimposed (up to 20MHz)	
Response Time	1.0ms to within 2% (for a 20% - 90% load change)	
Output Protection	Outputs protected against indirect transients to RIA 12	
Current Limit	Operates at approximately 120% of full power. Auto recovery.	
Isolation (tested at dc equivalent voltage)	Input to Output	1.0kV ac
	Output to Output	None

Environmental details

Parameter	Detail	
Operating Temperature	-25°C to +65°C (no derating)	
Storage Temperature	-40°C to +85°C	
Cooling	Convection	
Relative Humidity	99% max.	
Shock & Vibration	EN 50155 (EN 61373)	
Environmental Protection	IP65	

Technical drawing

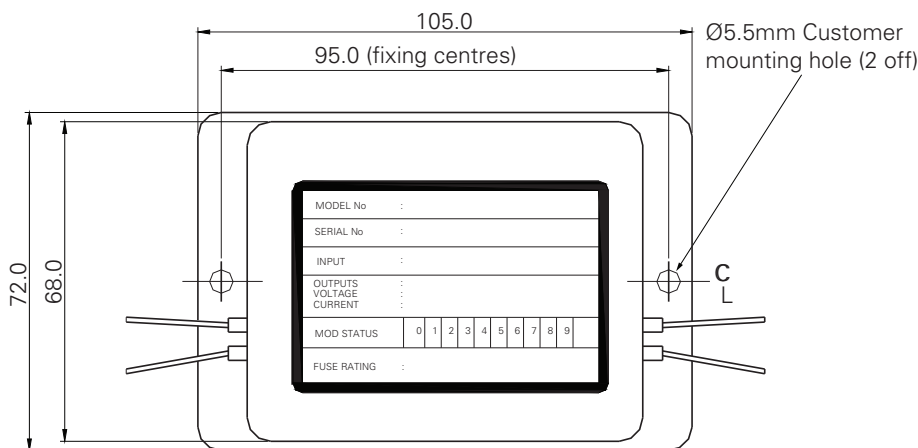

Notes:

All dimensions in mm.

Case: Moulded in flame retardant ABS to UL94 V-0.

All leadouts are 0.6mm² (19/0.2mm) halogen free cable

Length from outside of the potted box is

350mm ±10mm unterminated.


Cable marker code (as per label):

A: -Ve IN

B: +Ve IN

C: -Ve OUT

D: +Ve OUT

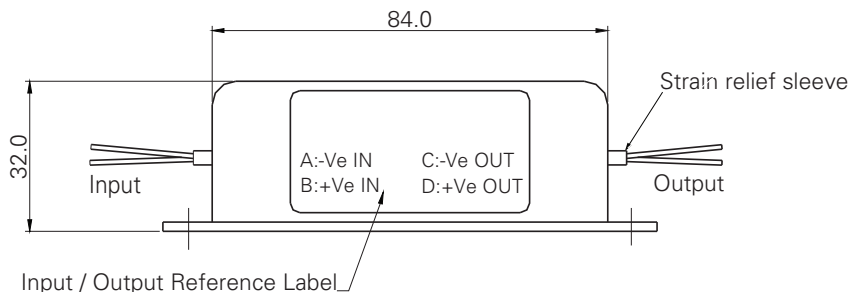

Applicable norms

Parameter	Detail
EMC	RIA 12, EN50155 (2017), EN50121-3-2 (2016)
Other	EN50155 (2017), EN45545-2

Mechanical characteristics

Parameter	Detail
Construction	Encapsulated Module
Dimensions	Length = 84 mm (mounting flange increases length to 105 mm)
	Width = 72 mm
	Height = 32 mm
Weight	300g
Connections	Solder pins for PCB mounting as standard Option for input / output cables (halogen free cable)
Fixings	Two Ø 5mm clear holes mounting flange

Options for MBRH series

Option	Detail	Code
Connections	Input / output cables 350mm	Q7
Connections	Input / output cables 600mm	Q8
Connections	Input cables 1000mm Output cables 300mm	Q12
DIN rail mounting plate	Drawing 900-931	D

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

Eaton Electrical Products Ltd
Glebe Farm Technical Campus
Knapwell, Cambridge, CB23 4GG
United Kingdom
Tel: +44 (0)1954 267726
MartekUKsales@eaton.com

© 2018 Eaton
All Rights Reserved
Publication No. PAXXXXXXXX / CSSC-281
October 2021

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

EATON
Powering Business Worldwide

Follow us on social media to get the latest product and support information.

